

Wrightliter (eyebrow) BM-2840

Uplighting
Downlighting
Pathlighting
Underwater Lighting
Architectural Lighting
Fountain/Statue Lighting
Highlighting
Deck/Dock Lighting
Stairway/Step Lighting
Backlighting
Spot Lighting
Reflective Lighting
Wall Lighting



Nightscaping®
1705 E. Colton Avenue
Redlands, California 92374
Tel: (909) 794-2121
Fax: (909) 794-7292
Help Line: (800) 544-4840
E-mail: info@nightscaping.com
<http://www.nightscaping.com>

Use the Nightscaping® Wrightliter in wet or dry locations. This member of our BrassMaster™ specification grade series is a natural for many hard to light areas. Mount the Wrightliter on retaining walls, along drives, into cheek walls, or on very wide staircases to provide functional lighting without glare. The solid cast Brass, durable construction makes this the perfect choice for high traffic or commercial areas.

Lamp Standard BM-2840BR -LO2036 (Standard)
Material: All Pressurized Die-Cast Brass
Finish: BM-2840 BR (Standard) Brass
BM-2840 BR-V Brass-Verde
BM-2840 BR-1, -2, -3, -4, -7, -8, -9, -AV, -VP, -W
(Optional w/surcharge)
Lens: Clear Tempered Glass (Standard)
Socket: Ceramic G6.35 Bi-Pin
Mounting: Recess Mount into Masonry, Wood or Soil (Standard)

Nightscaping®

Wrightliter (eyebrow)

BM-2840



Nightscaping®


Alternative Lamps: BM-2840BR -LO1024*, -LO2006, -LO2012, -LO3512, -LO3520, -LO3540, -LO4208, -LO5012, -LO5024, -LO5038, -LO5055, -LH5024*, -LH5036* (Optional)

Optional: See above indications

Accessories:

- Lens:**
 - NS-OK-C (Standard/Accessory) Clear Lens
 - NS-OK-S Spread Lens
- Shield: Cuts side light when lamp must be exposed to view.**
 - B-0011 Brass - Shield
- Stand:**
 - DO-4545BR Composite
- Lens Holders - Brass:**
 - B-0010 Convert existing BM-2840BR to this Ring Lens Holder. (Also replaces BM-2835BR lens holder)
 - B-0012 Convert existing BM-2835BR to this Shield Lens Holder. (Also replaces BM-2840BR lens holder)
- Mount Plate:**
 - SA-0606BR Brass - Works well in conjunction with Yoke Mount
- Yoke Mounting:**
 - SA-1222SS Convert existing BM-2840BR to Yoke Mount. (Also replaces BM-2835BR yoke mount)

Warranty: LIFE 'Repair or Replace' Warranty to original Owner.

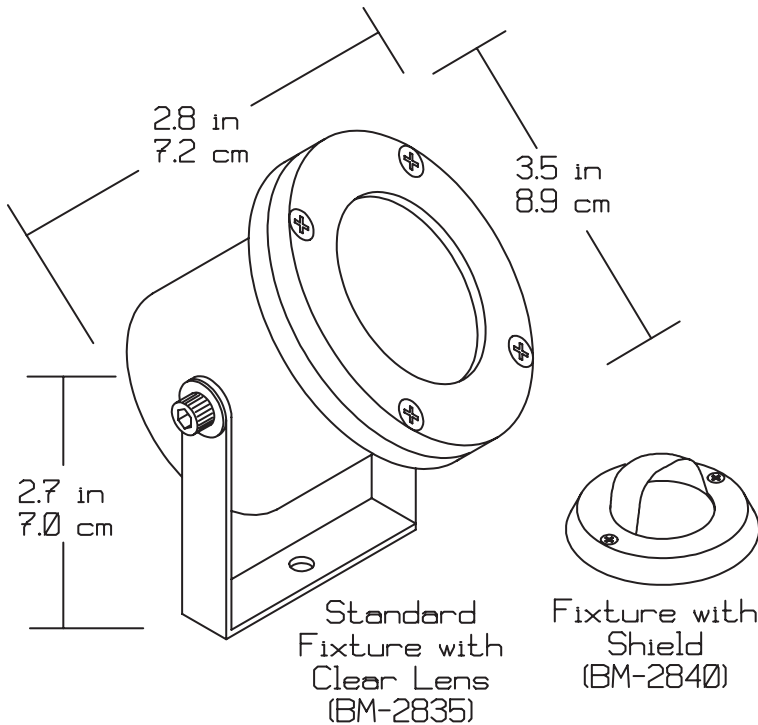

	LO 2036 (BAB) (20W)	42° x 42°
2ft	1'6"	131.3 FC
4ft	3'0"	32.8
6ft	4'7"	14.6
8ft	6'1"	8.2
10ft	7'8"	5.3
12ft	9'2"	3.7
14ft	10'9"	2.7
16ft	12'3"	2.1
18ft	13'9"	1.6
20ft	15'4"	1.3

STANDARD LAMP PHOTOMETRIC

DESIGN TIP*

Use in wet or dry locations.